


Technical Data Sheet



Shieldex® Balingen

No.: 1100501130

Purpose Conductive knitted fabric for general use
Excellent thermal conductivity
Base material for EMI/RFI application
Base material for antimicrobial purposes


Description Silver plated Nylon fabric

Plating 99% pure Silver
Surface Resistivity < 0.6 Ohms/□
Shielding Effectivity Average > 55 db from 300Mhz to 3Ghz
Temperature Range -30°C to 90°C
Total Thickness 0.260mm ± 10%
Weight 62g/m² ± 10%

Roll Width 140cm + 3-10cm
Roll Length Average 50m

Compliance and Certification

RoHS
REACH
Öko-Tex®

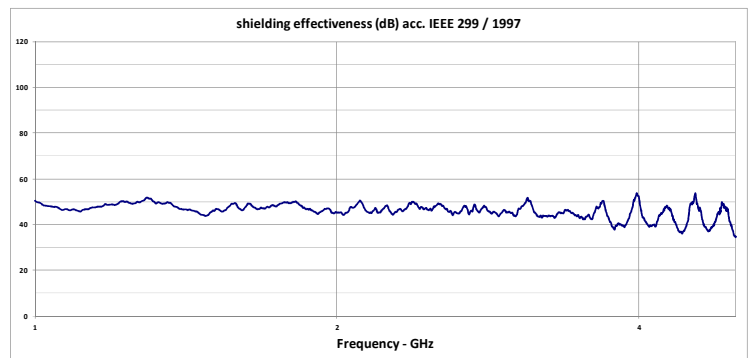

Alterations Reserved
20.03.13/04

visit: www.statex.de — contact: info@statex.de



PRODUKTIONS + VERTRIEBS

Kleiner Ort 11 - 28357 Bremen / Germany
Tel: +49 421 27 50 47 - Fax: +49 421 27 36 43
info@statex.de - www.statex.de