


Technical Data Sheet



Shieldex® Basel

No.: 1100301102

Purpose
Conductive non-woven for general use
Base material for composite shielding products
Base material for EMI/RFI garments
Passive static eliminator for copier, fax & printers
EMI/RFI cable shielding


Description
Silver plated Nylon fabric PBNII®; 1 Oz

Surface Resistivity
Average 0.6 Ohms/□
Shielding Effectivity
Average > 45 db from 300Mhz to 10Ghz
Temperature Range
-30°C to 90°C
Total Thickness
abt. 0.250mm
Tenacity MD
25N
Tenacity CD
42N
Weight
38g/m² ± 10%

Roll Width
98cm ± 2cm
Roll Length
50 or 100m

Compliance and Certification

RoHS
REACH

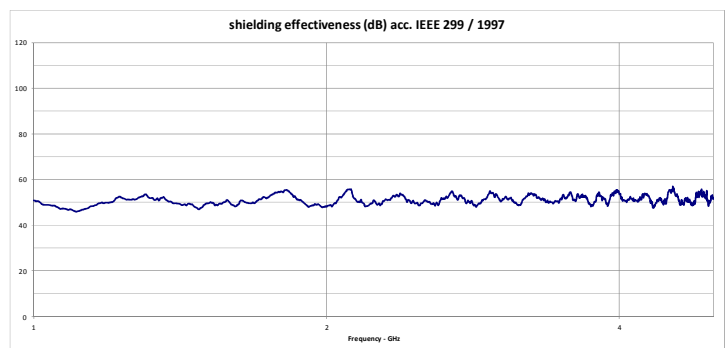

Alterations Reserved
24.04.2013/03

visit: www.statex.de — contact: info@statex.de



PRODUKTIONS + VERTRIEBS GMBH

Kleiner Ort 11 - 28357 Bremen / Germany
Tel: +49 421 27 50 47 - Fax: +49 421 27 36 43
info@statex.de - www.statex.de