


Technical Data Sheet




Shieldex® Bilbao

No.: 1100301104

Purpose	Conductive non-woven for general use
Description	Silver plated Nylon fabric Cerex; 0.5 Oz
Surface Resistivity	Average < 2 Ohms/□
Shielding Effectivity	Average > 45 db from 300Mhz to 10Ghz
Temperature Range	-30°C to 90°C
Elongation MD	53N (D 5034)
Elongation CD	33N (D 5034)
Air Permeability	7.70 m3/m2/sec (D737)
Total Thickness	0,18mm ± 10%
Weight	20g/m ² ± 10%
Roll Width	90 cm ± 2cm
Roll Length	50 or 100m

Compliance and Certification

RoHS
REACH
Öko-Tex®

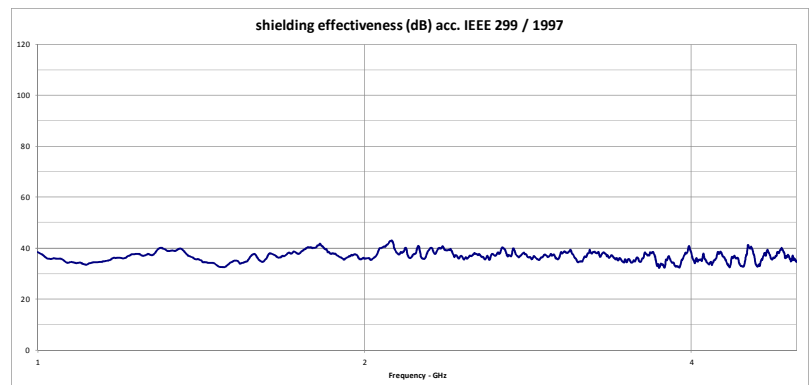

Alterations Reserved
10.07.13/05

visit: www.statex.de — contact: info@statex.de



PRODUKTIONS + VERTRIEBS GMBH

Kleiner Ort 11 - 28357 Bremen / Germany
Tel: +49 421 27 50 47 - Fax: +49 421 27 36 43
info@statex.de - www.statex.de