

Technical Data Sheet

| | |
|----|----|
| Ag | Ni |
| Sn | Cu |




Shieldex® Nora Dell

No.: 1401101S80

| | |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Purpose | Conductive woven fabric for general use (outside skin for EMI/RFI fabric over foam gaskets, shielding material for laminated flat I/O shielding panels, base material for EMI/RFI garments, EMI/RFI cable shielding) |
| Description | Ni/Cu/Ag plated polyamide fabric (RS) |
| Raw material | Parachute silk (polyamide ripstop fabric) |
| Surface resistivity | Average 0.009 Ohms/□ |
| Shielding effectiveness | Average up to 100 db from 30Mhz to 10Ghz |
| Temperature range | -30°C to 90°C |
| Total thickness | abt. 0.130mm ± 10% |
| Weight | 95g/m ² ± 10% |
| Roll width | 130cm ± 3% |
| Roll length | Average 200m |

Compliance and Certification

RoHS
REACH

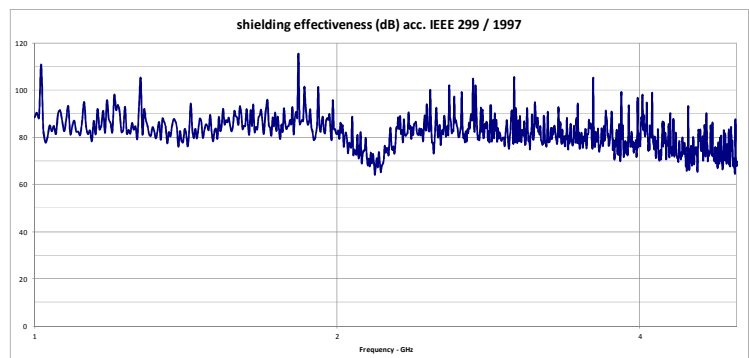

Alterations Reserved
26.04.13/03

visit: www.statex.de — contact: info@statex.de



PRODUKTIONS + VERTRIEBS GMBH

Kleiner Ort 11 - 28357 Bremen / Germany
Tel: +49 421 27 50 47 - Fax: +49 421 27 36 43
info@statex.de - www.statex.de