


Technical Data Sheet



Shieldex® Technik-tex P130

No.: 1150902130TB

Purpose High conductive fabric for general use
Base material for technical application,
EMI (shielding, reflection, sensing e. g. vital signs, stimulation
of nerves and muscles)


Description Silver plated knitted fabric

Raw material 78% Polyamide + 22% Elastomer
Plating 99% pure Silver
Coating Coating = Polyurethane as additional protective coating
Stretch DS (double stretch direction –wrap –weft)
Surface Resistivity < 2 Ohms/□ (front/visible side)
Temperature Range -30°C to 90°C
Total Thickness 0.45mm ± 10%
Weight 135g/m² ± 10%

Roll Width 132cm ± 5cm
Roll Length Average 30m

Compliance and Certification

RoHS
REACH
Öko-Tex®

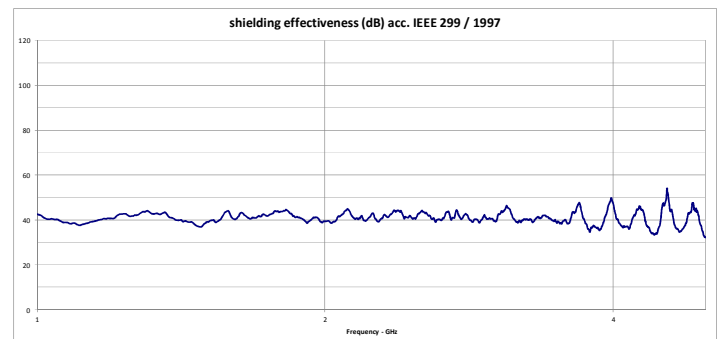

Alterations Reserved
18.12.12/05

visit: www.stateX.de — contact: info@stateX.de



PRODUKTIONS + VERTRIEBS GMBH

Kleiner Ort 11 - 28357 Bremen / Germany
Tel: +49 421 27 50 47 - Fax: +49 421 27 36 43
info@stateX.de - www.stateX.de