

# Technical Data Sheet

Ag	Ni
Sn	Cu



## Shieldex® Zell


No.: 1500101130

Purpose	Conductive woven fabric for general use (outside skin for EMI/RFI fabric over foam gaskets, shielding material for laminated flat I/O shielding panels, EMI/RFI cable shielding)
Description	Tin copper silver plated polyamide ripstop fabric
Surface resistivity	< 0.02 Ohms/□
Shielding effectiveness	Average up to 80 db from 300Mhz to 10Ghz
Temperature range	-30°C to 90°C
Total thickness	0.110mm ± 10%
Weight	77g/m <sup>2</sup> ± 10%
Roll width	130cm ± 3%
Roll length	max 200m

visit: [www.statex.de](http://www.statex.de) — contact: [info@statex.de](mailto:info@statex.de)

## Compliance and Certification

RoHS  
REACH

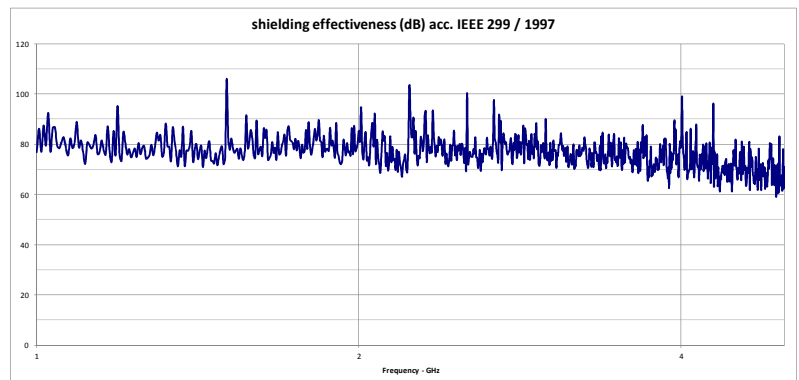

Alterations Reserved  
04.03.2014/07



PRODUKTIONS + VERTRIEBS GMBH

Kleiner Ort 11 - 28357 Bremen / Germany  
Tel: +49 421 27 50 47 - Fax: +49 421 27 36 43  
[info@statex.de](mailto:info@statex.de) - [www.statex.de](http://www.statex.de)